


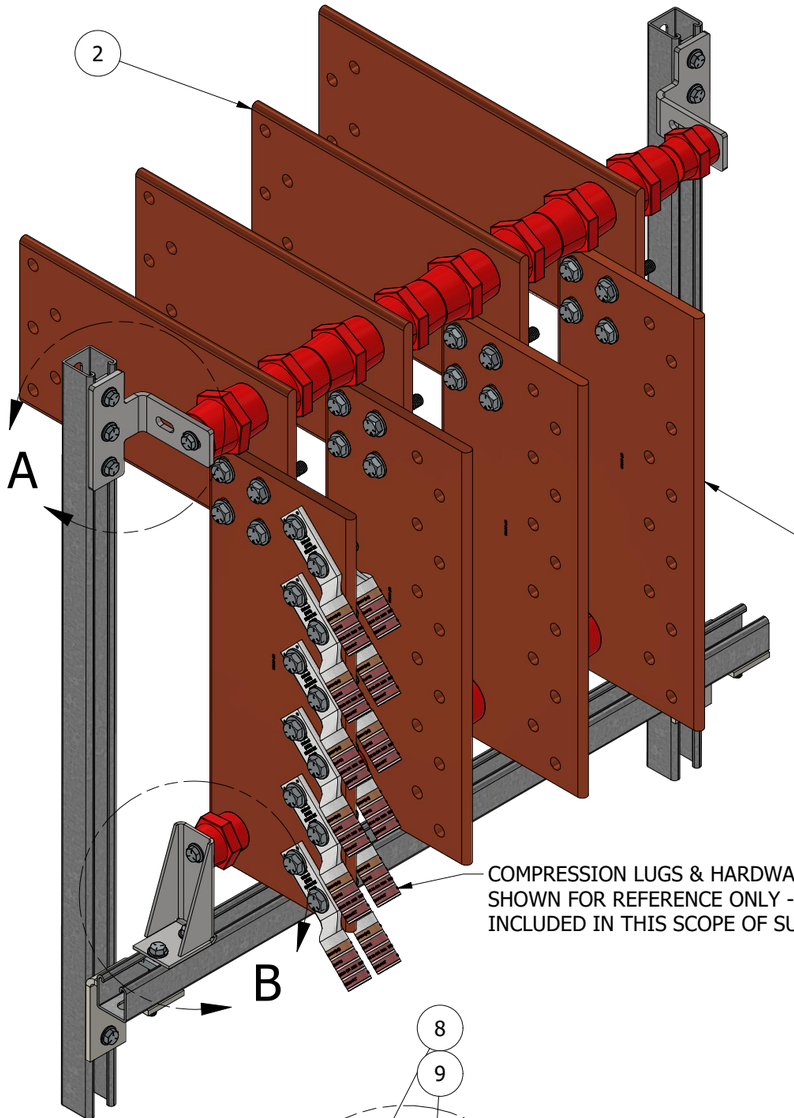


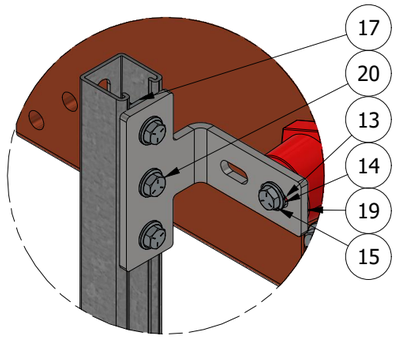


DETAIL A
SCALE 1 / 4

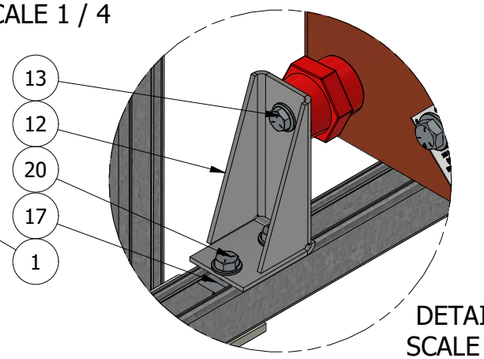

DETAIL B
SCALE 1 / 4

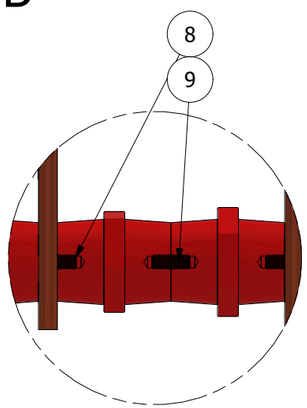

DETAIL C
SCALE 1 / 4

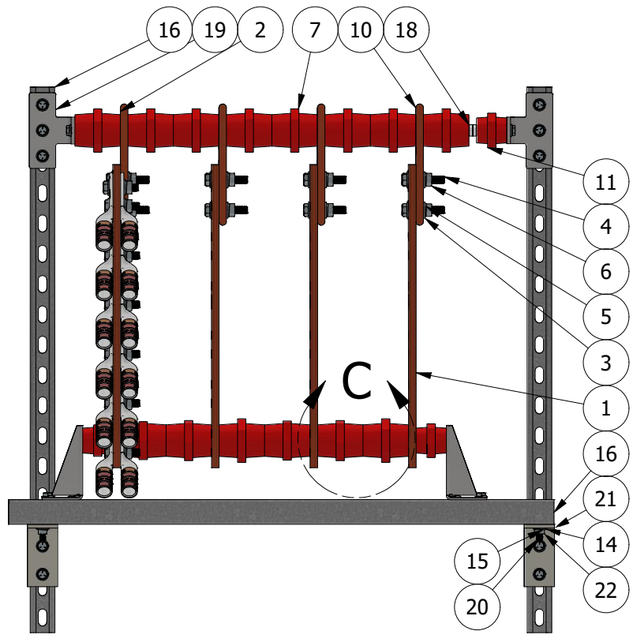

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	QT-00133	VERTICAL TRANSITION BUS, 4000A
2	3	QT-00131	HORIZONTAL TRANSITION BUS, 4000A (PHASE)
3	32	90126A211	WASHER, SAE FLAT 1/2" ZPS
4	16	91247A722	CAPSCREW, HEX HEAD 1/2"-13 X 2 1/2" ZPS
5	16	92507A130	WASHER, SPLIT LOCK 1/2" ZPS
6	16	95462A033	NUT, HEX 1/2" - 13 ZPS
7	14	5300-S10-10	INSULATOR, 3/8"-16 X 3"
8	9	95475A628	ROD, STEEL THREADED 3/8"-16 X 1 1/2" ZPS
9	6	95475A624	ROD, STEEL THREADED 3/8"-16 X 1" ZPS
10	1	QT-00132	HORIZONTAL TRANSITION BUS, 4000A (NEUTRAL)
11	3	4200-S5-10	INSULATOR, 3/8"-16 X 2"
12	2	QTIS-00008	BRACKET, PULL BOX STANDOFF
13	4	92865A624	CAPSCREW, HEX HEAD 3/8"-16 x 1" ZPS FT
14	22	90126A208	WASHER, SAE FLAT 3/8" ZPS
15	20	92507A120	WASHER, SPLIT LOCK 3/8" ZPS
16	3	3310T636	CHANNEL, STRUT 36"
17	14	3259T32	NUT, STRUT CHANNEL 3/8"-16 (3259T18 SHOWN)
18	2	92510A491	SPACER, AL UNTHREADED 3/4" OD X 1/4" X 3/8" ID
19	2	SRJB-00002	BRACKET, TRANSITION UPPER SUPPORT, 4000A
20	16	92865A626	CAPSCREW, HEX HEAD 3/8"-16 X 1 1/4" ZPS
21	2	QT-00237	BRACKET, STRUT CHANNEL
22	2	95462A031	NUT, HEX 3/8"-16 ZPS

THIS DRAWING / BOM INCLUDES ALL KIT00031-QTC / QTKC-0031 COMPONENTS. PLEASE SEE BUILD SHEET FOR FURTHER DETAILS

Notes:

1. WHEN PROPERLY ASSEMBLED, THE CONDUCTOR STACK MAY BE MOVED VERTICALLY WITHIN THE APPROPRIATE CHANNELS.
2. COMPRESSION LUGS AND ATTACHING HARDWARE ARE SHOWN FOR REFERENCE PURPOSES ONLY AND ARE NOT INCLUDED WITH THE PULL BOX ASSEMBLY.
3. MCMASTER HARDWARE PROVIDED FOR CONVENIENCE, LIKE HARDWARE MAY BE SUBSTITUTED.

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	Initial Release	18-Oct-26	TDU
B	BOM Update	22-Oct-26	TDU

Drawing Title:
Transition Group, 3000A Pull Box

Description:
Interior structure of 4000A pull box cabinet

PROJECT: 4000A Pull Box
FILE NAME: Transition Group, 4000A Pull Box.iam
ASSEMBLY: Transition Group, 4000A Pull Box
*** NOT FOR MANUFACTURING ***

DFTR: Ted Ulrich
ENGR:
REV: B
DATE: 21-Oct-26

EPEC SOLUTIONS, INC.
Technical Services Department
8878 Clayton Blvd Suite 300
Clayton, NC 27520
support@epecsolutionsinc.com